

QuikArt™ Toggle Template Attachment Suggestions by Mary Ann Devos


1. After firing and polishing, drill a hole in the center of the toggle bar large enough to allow an 18 gauge wire to pass through.
2. Cut a 1.5" length of 18 gauge fine silver wire and use a butane torch to ball one end.
3. Pass the wire through the toggle bar so that the ball is on the top of the bar.
4. Use a tool (e.g. small steel burnisher, end of round nose pliers) to form a loop in the wire immediately below the bar. Wrap the end of the wire around itself next to where it passes through the bar forming a secure loop.
5. Use one or more jump rings to attach the bar loop to your necklace.
6. Decide which side of the toggle you want to have next to the necklace and drill a hole through the toggle there. Be sure to place the hole at least 1/8" from the edge of the toggle to maximize the strength of the attachment. Make the hole large enough to allow the jump ring you will use to attach the toggle to the necklace to pass through.
7. Use additional jump rings as desired to attach the toggle to the necklace.
8. Before attaching the toggle and bar to the necklace, tumble them to work harden and strengthen both parts.



Toggle Sample



Bar Loop Instructions

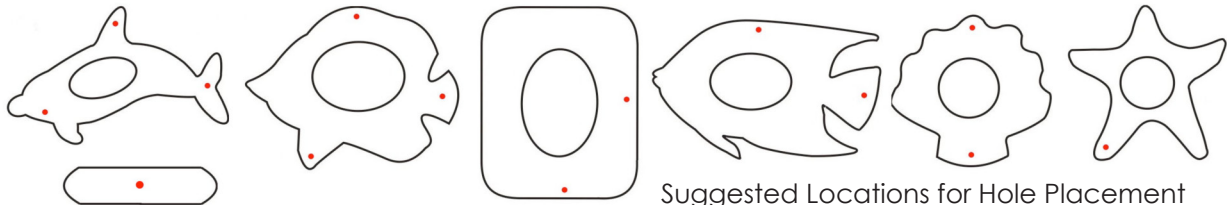

Suggested Locations for Hole Placement

Only one hole per toggle is needed. Take your pick or choose your own location.)

Available at www.MetalClaySupply.com

QuikArt™ Toggle Template Attachment Suggestions by Mary Ann Devos


1. After firing and polishing, drill a hole in the center of the toggle bar large enough to allow an 18 gauge wire to pass through.
2. Cut a 1.5" length of 18 gauge fine silver wire and use a butane torch to ball one end.
3. Pass the wire through the toggle bar so that the ball is on the top of the bar.
4. Use a tool (e.g. small steel burnisher, end of round nose pliers) to form a loop in the wire immediately below the bar. Wrap the end of the wire around itself next to where it passes through the bar forming a secure loop.
5. Use one or more jump rings to attach the bar loop to your necklace.
6. Decide which side of the toggle you want to have next to the necklace and drill a hole through the toggle there. Be sure to place the hole at least 1/8" from the edge of the toggle to maximize the strength of the attachment. Make the hole large enough to allow the jump ring you will use to attach the toggle to the necklace to pass through.
7. Use additional jump rings as desired to attach the toggle to the necklace.
8. Before attaching the toggle and bar to the necklace, tumble them to work harden and strengthen both parts.



Toggle Sample



Bar Loop Instructions

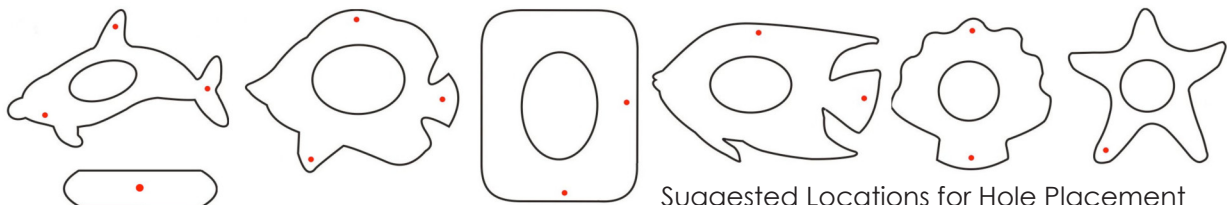

Suggested Locations for Hole Placement

Only one hole per toggle is needed. Take your pick or choose your own location.)

Available at www.MetalClaySupply.com